


TDC.310

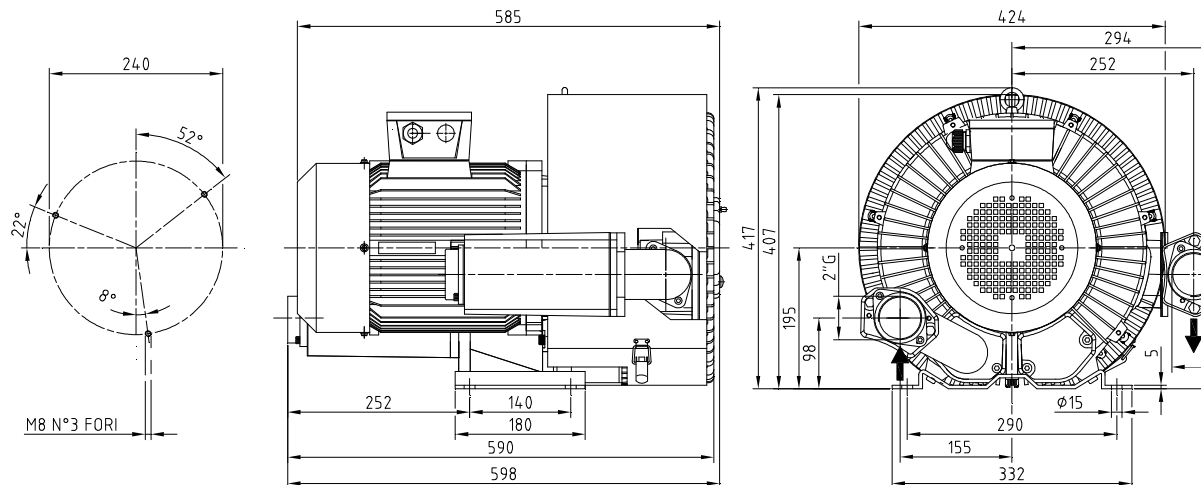


TDC.310-1


Subject to change without prior notice

Modello Model		TDC.310	TDC.310-1
Codice Code		9403035	9403036
Potenza motore Motor Power	kW (50Hz) kW (60Hz)	4,0 4,8	5,5 6,5
Alimentazione Power supply	V±5% Δ/Y (50Hz) V±5% Δ/Y (60Hz)	220-255 / 380-440 255-277 / 440-480	
Assorbimento Adsorbition	A Δ/Y (50Hz) A Δ/Y (60Hz)	14,3 / 8,2 16,2 / 9,3	21 / 12 26,5 / 15,3
Portata Flow rate	m³/h (50Hz) m³/h (60Hz)	310 360	310 360
Vuoto Vacuum	mbar (50Hz) mbar (60Hz)	-350 -390	-410 -420
Sovrappressione Pressure	mbar (50Hz) mbar (60Hz)	+390 +390	+510 +520
Rumorosità (UNI EN ISO 2151) (K 3dB) Noise level (UNI EN ISO 2151) (K 3dB)	dB(A) (50Hz) dB(A) (60Hz)	75 79	76 79
Peso Weight	kg [N]	56 [549,4]	58 [569]


Vacuum @ 50Hz – 400V

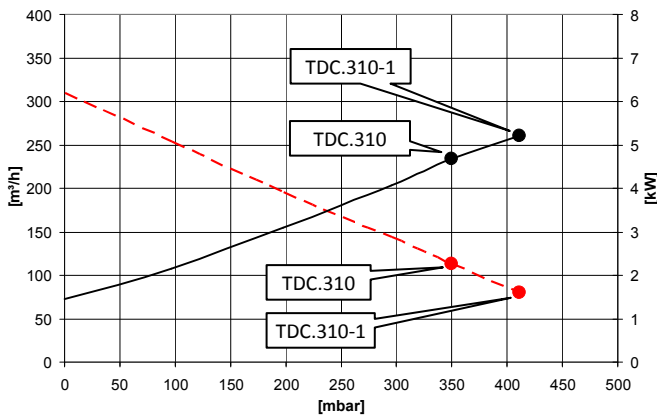


Pressure @ 50Hz – 400V

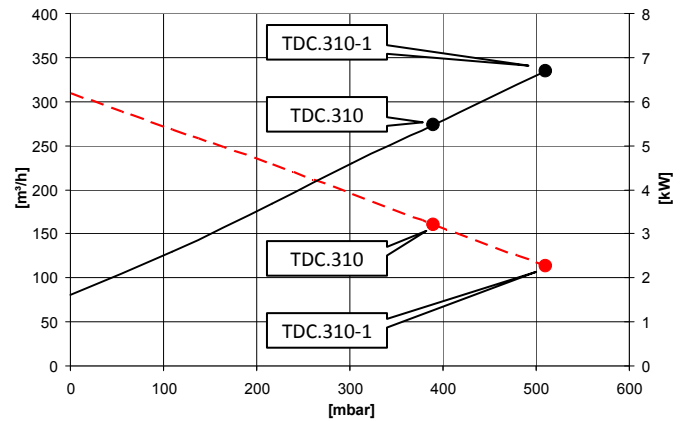

Vacuum @ 60Hz – 460V

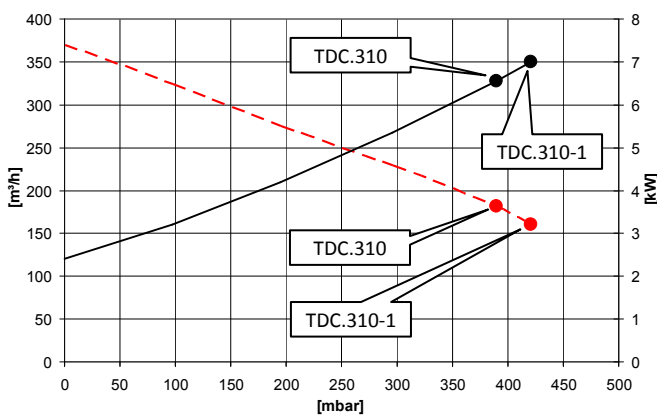

Pressure @ 60Hz – 460V

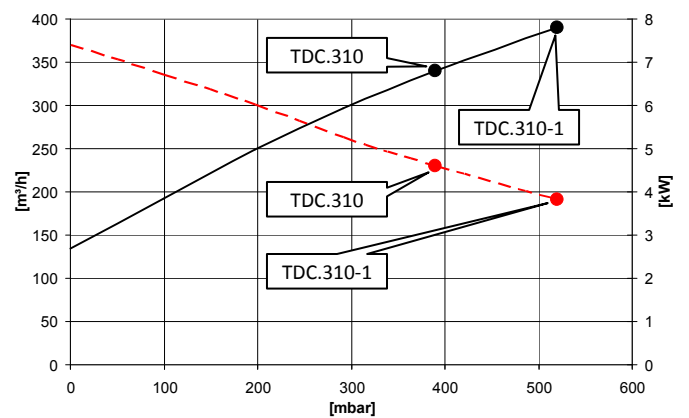


----- Portata / Flow rate


———— Pot. Assorbita / Absorbed Power

Curve riferite alla pressione di 1013mbar (Ass.) e temperatura 20°C (tolleranza ±10%)
Curves referes to 1013mbar (Abs.) pression and 20°C temperature (tolerance ±10%)

50Hz – 400V

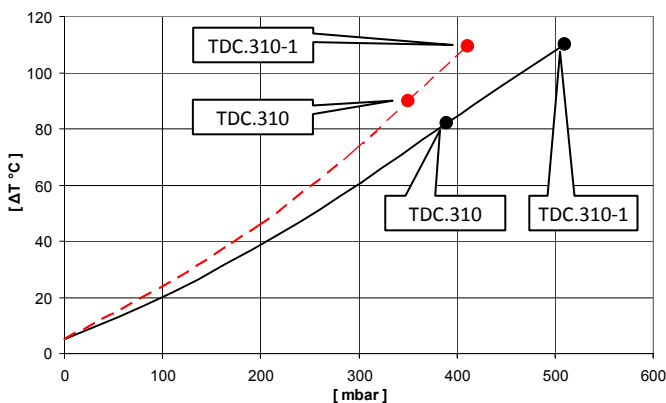

60Hz – 460V

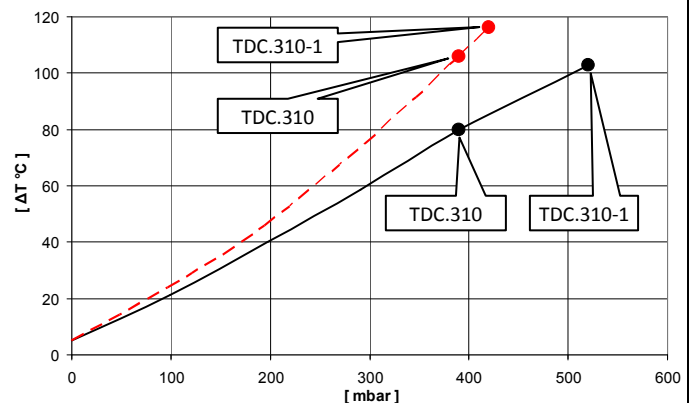

----- Aspirazione / Suction

———— Mandata / Compression

Temperatura ambiente 20°C (tolleranza sulla temperatura ΔT ±5°C)
Room temperature 20°C (tolerance on temperature ΔT ±5°C)

Subject to change without prior notice